




COLLOMATIC

The specialist in renovation

XM-2 650 – optimum mixing
in the shortest possible time with
perfect material characteristics

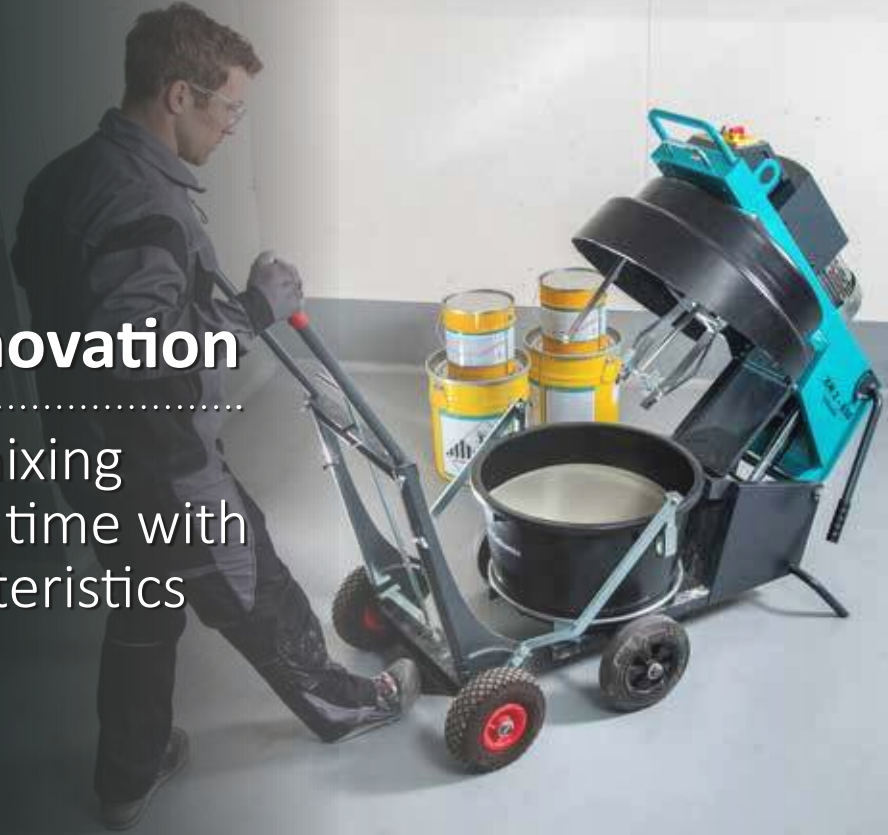

› Materials and applications

MADE IN
GERMANY

• Concrete repair mortars •



• Synthetic resin coating •



Synthetic resin mortar



• Restoration plaster •



• Pavement grout •



• Casting mortar •




XM-2 650 forced-action mixer

- Mobile high-performance forced-action mixer. Ideal areas of application include the refurbishment sector and industrial floor coating. Thanks to various tooling and different speeds, the non-plus-ultra in effectiveness and quality.
- Forced-action mixer with high torque for fast and optimised mixing with perfect material characteristics.
- Ideal for industrial floor coatings, multi-component resin systems, concrete renovation, grouting work, sewer and water pipe renovation, floor construction, etc.
- 2 sets of mixing tools with different speeds, plus rim scraper
- High hourly throughput thanks to short mixing times (-1 ton /h) and easy operation
- Configurable timer (90, 180 sec., permanent mode)
- A transport trolley accessory completes the system
- Recommended by leading building chemical manufacturers

XM 160 XM 195



› Tool set 1*



XM 160 SR 160

› Tool set 2**



› Additional accessory: Transport trolley



› Scope of delivery

Material (weight without the addition of water) *Tool set 1 **Tool set 2

Material	*Tool set 1	**Tool set 2
Earth-moist concrete -16 mm grain size	+	-
Cement screed	+	-
Prebagged loam rendering without fibres	+	-
Heat insulation plaster	+	-
Restoration render	+	-
Natural stone mortar/cobblestone mortar	+	-
Pavement grout (up to 1.2 mm)	+	-
Tile adhesive(flexible mortar)	+	-
thin/fluid screed types	+	+
Bonding agents as rendering base	-	+
Grout	+	-
Joint-sealing compounds	-	+
Bonding agents	-	+
Multi-component seaming slurries	-	+
Levelling compounds	-	+
Epoxy resin sand mixture	+	-
Heat insulation adhesive	+	-
High-performance mortar (Flowstone)	+	-
Restoration plaster	+	-
Synthetic resin mortar	+	-
Synthetic resin coatings	-	+

Technical data

Mixing quantity:	up to 13 gal
Bucket capacity:	17 gal
Mixing tool output:	110 v (single phase)
Speed of mixing tool:	2 x 185 1 x 670 rpm ⁻¹
Scraper speed:	40 rpm ⁻¹
Weight (empty):	231 lbs
Dimensions:	42.2" x 33.3" x 28.7"
XM 2-650 110 v item no.:	39017
XM 160 mixing tool item no.:	70153
XM 195 mixing tool item no.:	70155
SR 160 mixing tool item no.:	70157
17 gal mixing bucket item no.:	60403
Transport trolley item no.:	70183

Your Collomix specialised distributor:



Collomix North America | P.O. Box 13007 | Milwaukee, WI 53213
office@collomix.com | www.collomix.us

